

- World's only "DUAL SPRING MECHANISM"
- Stronger Contact Pressure, Higher Vibration/Impact Durability
- Bigger non-trip current receivable  
6.5A(\* ΔT=15K)  
\* ΔT=Operating Temp. minus ambient temp.

## BPC


thermal protector  
battery protector



### Specifications

- Operating Temp 60°C~100°C(5°C step)
- Tolerance ±5°C、±7°C、±10°C
- Resetting Temp 46°C or higher
- Maximum non-trip current  
10A(Operating Temp 75°C Ambient 25°C)  
6A(Operating Temp 80°C, ΔT=15K)  
ΔT= operating temp - ambient temp
- Maximum cut-out current 120A 12V DC

### Dimensions

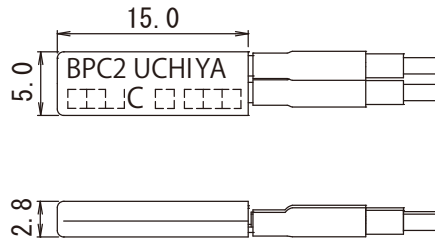

### Applications


- Lithium-ion Battery Pack
- NiMH Battery Pack
- NiCd Battery Pack

### Safety Approval


※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings	Max Temp	File No.
<b>BPC</b>	UL	UL 873	Regulating	6A/ 18V DC (resistive) 6000 cycles	100°C	E50124
	c-UL	CSA C22.2 No. 24	Appliance Control	6A/ 18V DC (resistive) 6000 cycles	100°C	E50124
	EN(VDE)	EN 60730-2-9	Thermal Cut-out	6A/ 18V DC (resistive) 6000 cycles	100°C	892100-45100-0034
	CQC	GB 14536.10	Thermostat (Non-fused bimetal type)	6A/ 18V DC (resistive)	100°C	CQC11002059931 CQC11002059933

### Graph Left: Tripping Time vs Current (at 25°C)

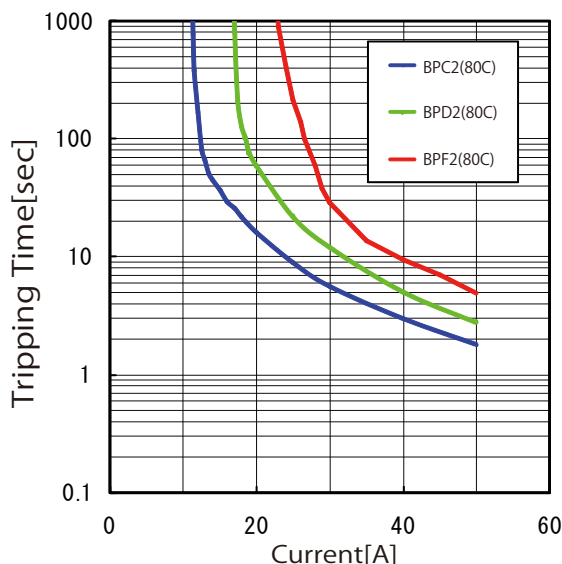

### Graph Right: Operating Temp. Drop due to Current

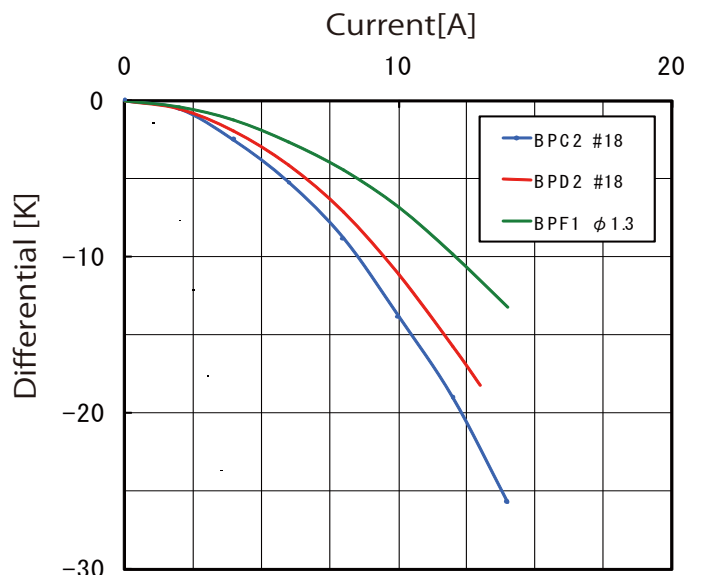

### Variation

**BPC**

	Lead
	None
1	Uninsulated Solid
2	insulated wire
3	Nickel Ribbon

Further information, write or call;

UCHIYA THERMOSTAT CO.,LTD.  
2-176-1 TAKASU, MISATO-SHI,  
SAITAMA-KEN 341-0037, JAPAN

E-mail: sales@uchiya.co.jp  
URL: http://www.uchiya.co.jp  
TEL: (+81)-48-955-4181  
FAX: (+81)-48-956-1310