



- Upgrade of global standard model UB7 (same mount pitch as UB7)
- Phenol walls prevent spark
- **Larger Electrical Capacity**  
125V/25A by UL recognition,  
250V / 16(2)A by VDE approval.  
Suitable to use in heating appliance of 2kW and more

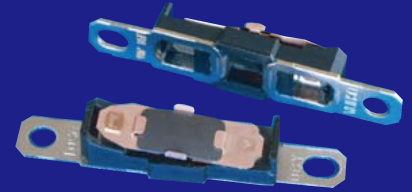

### Specifications

- Operating Temp 60°C~150°C(5°C step)
- Tolerance ±5°C、±7°C、±10°C
- Differential 30±15K(Standard)
- Breaking capacity  
25A 125V AC 6000 cycle(resistive)  
13A 250V AC 6000 cycle(resistive)

### Dimensions

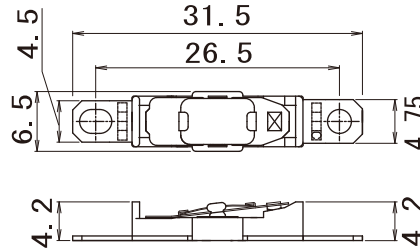

### Applications


- Overheat Protector
- 2Kw Hair Drier
- Fan Heater
- Hand Dryer

### Safety Approval


※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings	Max Temp	File No.
<b>UB8</b>	UL	UL873	Regulating	25A /125V AC (resistive) 6000 cycles	150°C	E50124
	UL	UL873	Regulating	13A /250V AC (resistive) 6000 cycles	150°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	25A /125V AC (resistive) 6000 cycles	150°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	13A /250V AC (resistive) 6000 cycles	150°C	E50124
	EN (VDE)	EN 60730-2-9	Thermal Cut-out	16A(2A)/250V AC resistive (inductive)10000 cycles	150°C	892100-4510-0033
	CQC	GB14536.10	Thermostat (Non-fused bimetal type)	25A/125V, 13A/250V AC	150°C	CQC11002059930 CQC11002059934

### Graph Left : Tripping Time vs Current (at 25°C)

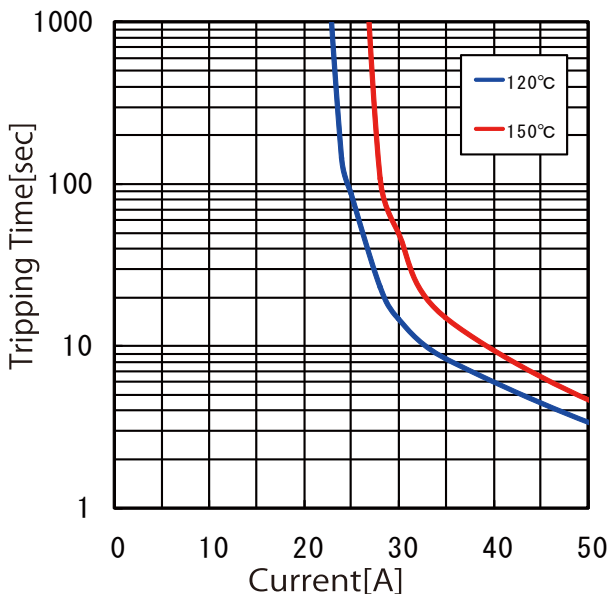

### Graph Right : Operating Temp. Drop due to Current

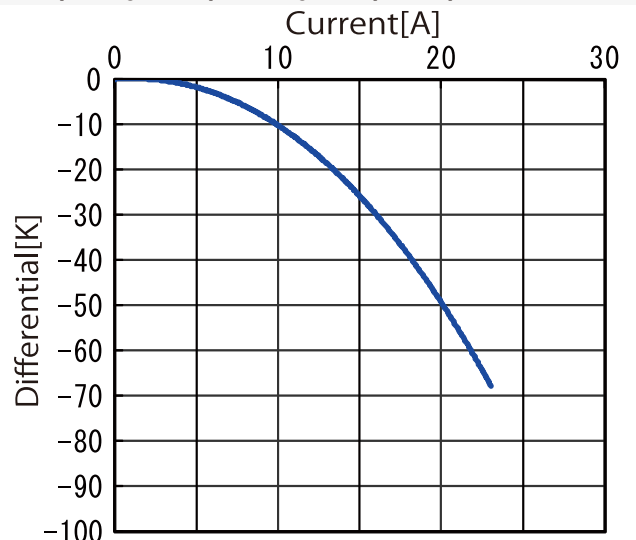

**Variation**

Dust Cover	
<input type="checkbox"/>	No
<input checked="" type="checkbox"/>	Yes
Reset	
<input checked="" type="checkbox"/>	Automatic
<input type="checkbox"/>	Off Self-Hold